

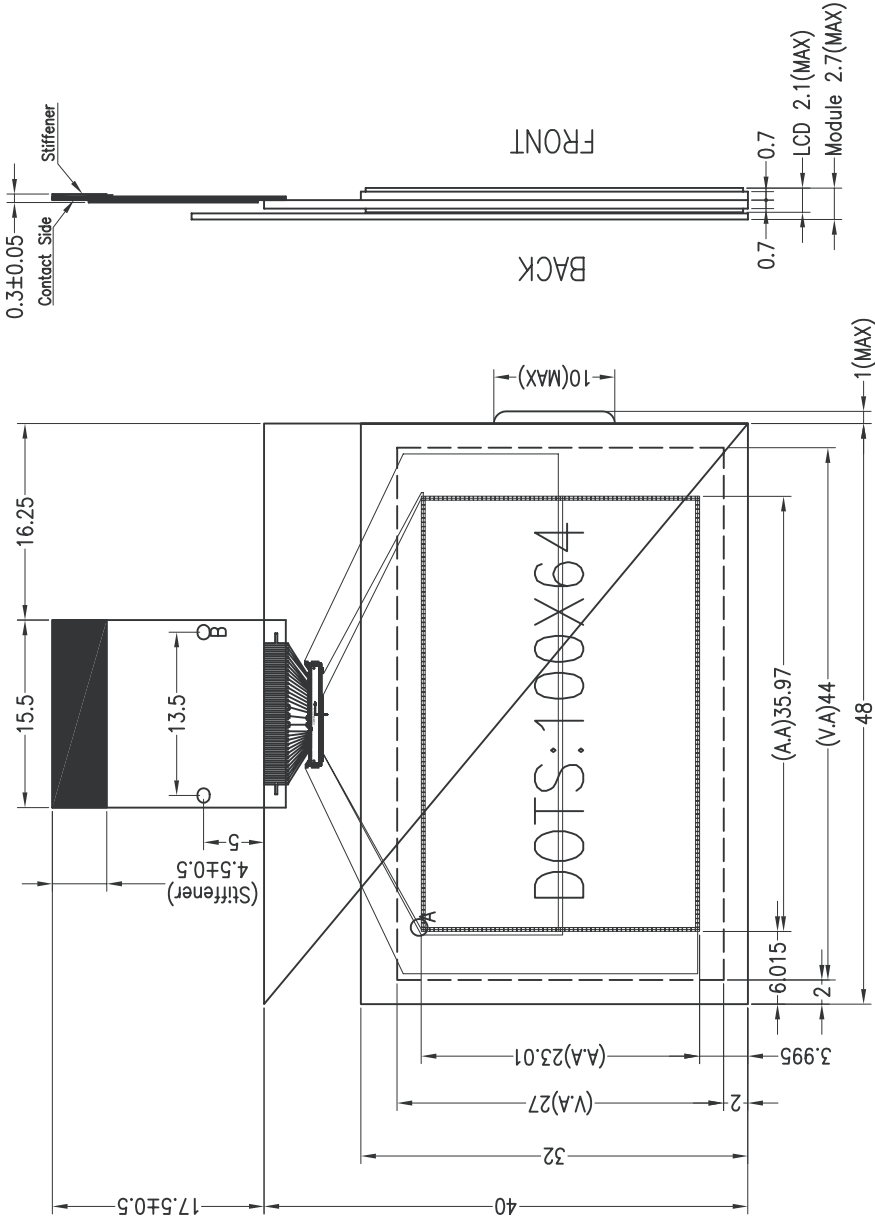



Note: The thickness of the module is 2.7mm(MAX).




DISPLAY TYPE: FSTN, Transflective, Positive
VIEWING DIRECTION: 6:00
DRIVER IC: NT7534H-BDT OR EQUIV
LOGIC VOLTAGE: 3.0±0.3V
LCD DRIVE VOLTAGE(V_{lcd}): 9V
DRIVING METHOD: 1/65 DUTY, 1/9 BIAS
BACKLIGHT: N/A
OPERATING TEMPERATURE: -10° ~ +50°C
STORAGE TEMPERATURE: -15° ~ +60°C
INTERFACE CONNECTOR: FPC
ALL UNMARKED TOLERANCES: ±0.3mm

Detail A Detail B



Note: The driver IC is NT7534H-BDT.

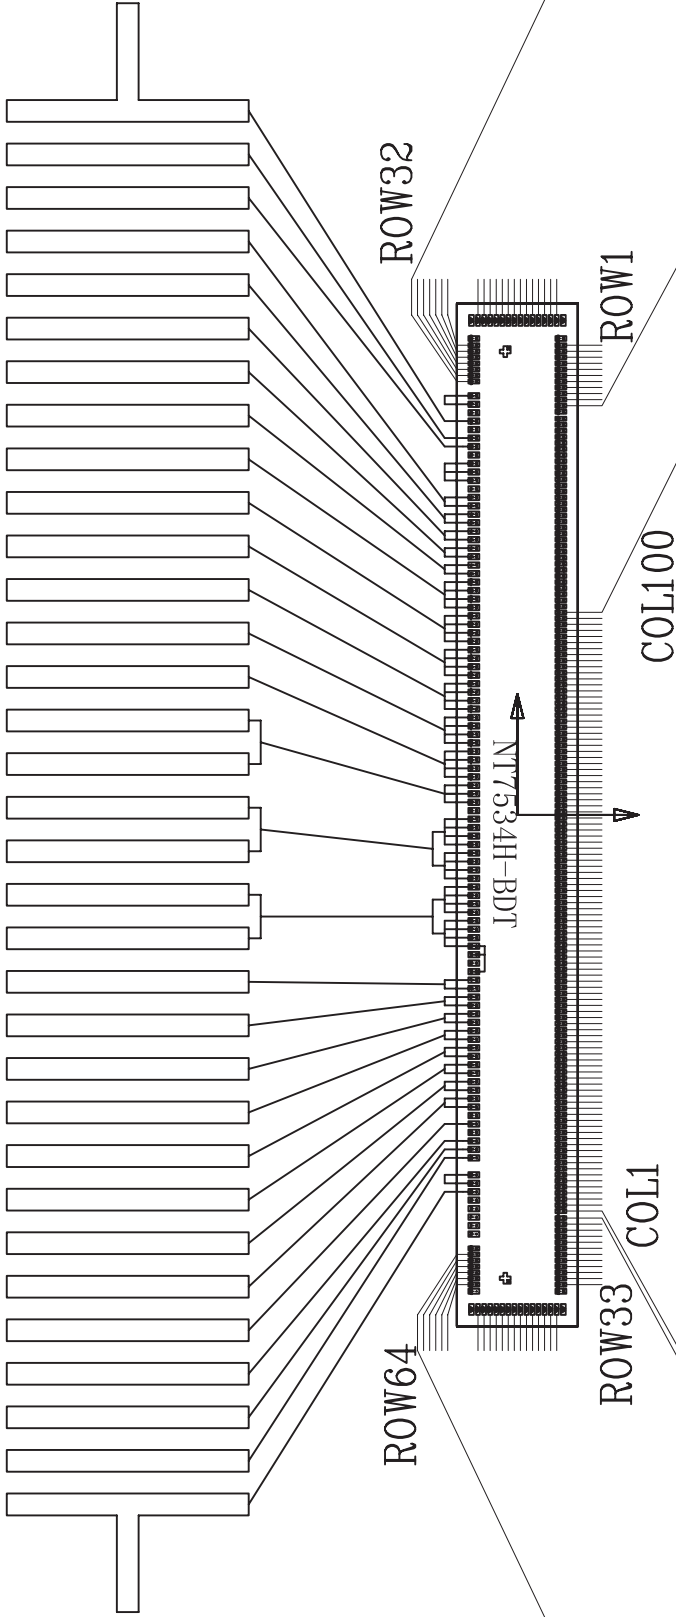

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
NAME	/CS1	/RES	A0	/WR	/RD	D0	D1	D2	D3	D4	D5	D6	D7	VDD	VSS
PIN	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
NAME	VOUT	C3+	C1-	C1+	C2+	C2-	NC	1A	V2	V3	V4	V0	C86	P/S	/HPM

